


Teflex Woven

- Teflex Woven is a pure woven PTFE.
- Teflex Woven is capable of running at high temperatures.
- Continuously operating at 260°C / 500°F with short term surges at 280°C / 536°F.
- Can be used on products across the full pH scale, i.e. either caustic or acid products will not effect Teflex Woven.

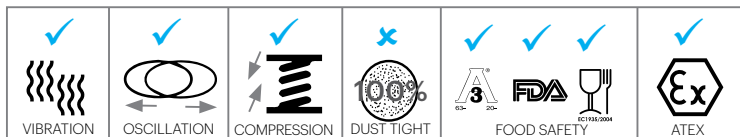

PHYSICAL PROPERTIES:

Fibre	PTFE	
Colour	Natural (dark brown)	
Construction/finish	Basket weave	
Weight	678 g/m ² 20 oz/yd ²	
Thickness (mm)	0.5mm / 1/64"	
Max. Operating Temp	260°C / 500°F	
Max. Surge Temp	280°C / 536°F	
Low Temp Flexibility	Good	
Surface Resistance (Ohms)	Insulative	
Minimum Tensile Strength measured as a force over a 25mm wide Ravel Strip	Fabric Warp 90) Weft 100)	kgf/25mm
<i>(Test Standard: ASTM D5035)</i>		
Ultimate Elongation (%)	55	
<i>(Test Standard: ASTM D5035)</i>		
Air Permeability:		
	(cm ³ /cm ² sec@125Pa)	0.3
	(ft ³ /ft ² /min@0.5" wg)	0.5
AVAILABLE SIZES: <i>(in 50mm / 2" increments)</i>		
Diameter <i>(also available in 125mm/5")</i>	Ø100mm, 150mm to 1,650mm (4", 5" to 65")	
Length	80mm , 100mm to 1,500mm (3", 4" to 59 1/6")	
<i>NB: Some size restrictions apply for TR versions, larger diameters and connectors with rings.</i>		
COMPLIANCE:		
Atex Compliant: IBExU tested. Can be used in certain dust explosion hazardous areas (restrictions apply). PTFE is compliant with FDA 21 CFR 177.1550, 178.3297.		